
DATE

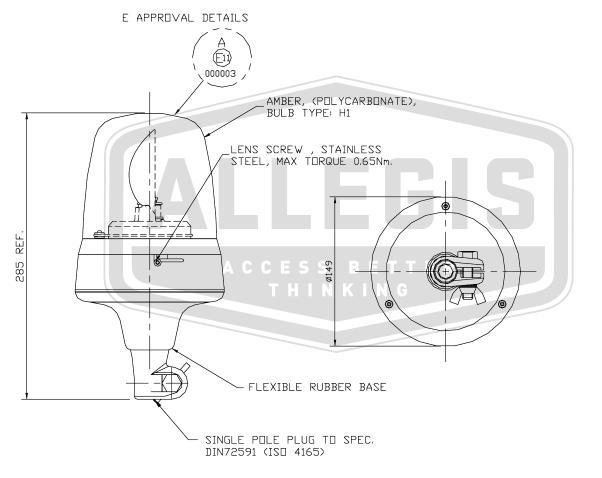

- ENVIROMENTAL PERFORMANCE :-1. COMPLIES WITH BRITAX (PMG) LTD SPECIFICATION ENS 054, SAE J845 AND VIBRATION TO SAE J575 JUL'83.
- 1.1 APPROVED TO EMC DIRECTIVES 95/54/EC 2000/2/EC AND 97/24/EC ch8.
- 1.2 COMPLIES WITH ELECTROMAGNETIC COMPATIBILITY DIRECTIVE 89/336/EEC.
- 1.3 APPROVED TO ECE REG.10 AND REG.65.

DPERATING TEMPERATURE, -30 TD +50 DEG.C VDLTAGE 12V BULB TYPE 11 55W CURRENT CONSUMPTION 14.66 CC WANTER

UPERATING TEMPERATUR
VOLTAGE
BULB TYPE
CURRENT CONSUMPTION
FLASH RATE

: 160 PER MINUTE - N□MINAL : CW FR□M AB□VE

ROTATION

DIMENSIONS IN MILLIMETRES DO NOT SCALE

IF IN DOUBT - ASK

DRAWN IN ACCORDANCE WITH BS308

DIMENSIONAL TOLERANCES :

ALLEGIS	1-866-378-7550
MATERIAL:	DRAWING NO.:
	395.100.12V.PC
FINISH:	•
Amber	
REV.: 1:1	DATE: 6/12/2019