

ASSEMBLY PART NUMBERS AND DESCRIPTION


PANEL THICKNESS	MED. LEVER GRIP RANGE*	BLACK ASSEMBLY WITH PLATED STEEL HARDWARE	BLACK ASSEMBLY WITH STAINLESS STEEL HARDWARE	SILVER ASSEMBLY WITH PLATED STEEL HARDWARE	SILVER ASSEMBLY WITH STAINLESS STEEL HARDWARE	CARDINAL WHITE ASSEMBLY WITH PLATED STEEL HARDWARE	CARDINAL WHITE ASSEMBLY WITH STAINLESS STEEL HARDWARE
1-11	14-29	C5-11-25	C5-11-26	C5-11-23	C5-11-24	C5-11-21	C5-11-22
11-21		C5-12-25	C5-12-26	C5-12-23	C5-12-24	C5-12-21	C5-12-22
21-31		C5-13-25	C5-13-26	C5-13-23	C5-13-24	C5-13-21	C5-13-22

* SHORT LEVER GRIP RANGE AVAILABLE FROM 1 TO 14 MILLIMETERS. REFERENCE DRAWING NUMBER J-C5-1
 LONG LEVER GRIP RANGE AVAILABLE FROM 29 TO 45 MILLIMETERS. REFERENCE DRAWING NUMBER J-C5-3

MATERIAL AND FINISH

LATCH ASSEMBLY CONSISTS OF:
 HOUSING, HANDLE AND BUTTON:
 DIE CAST ZINC, SEE TABLE FOR FINISH.
 LEVER AND CRANK: DIE CAST ZINC, COATED WITH CLEAR CHEMICAL PROTECTIVE FILM.
 BLACK TORSION SPRING: 303 STAINLESS STEEL, PASSIVATED.
 ROLL PINS: 420 STAINLESS STEEL, PASSIVATED.
 O-RINGS: BUNA-N RUBBER, NATURAL.

HARDWARE CONSISTS OF:
 MOUNTING BRACKET
 MOUNTING SCREW
 ADJUSTING SCREW
 JAM NUT
 1010 STEEL, ZINC PLATED WITH SEALED CHROMATE.
 OR
 300 SERIES STAINLESS STEEL, PASSIVATED.

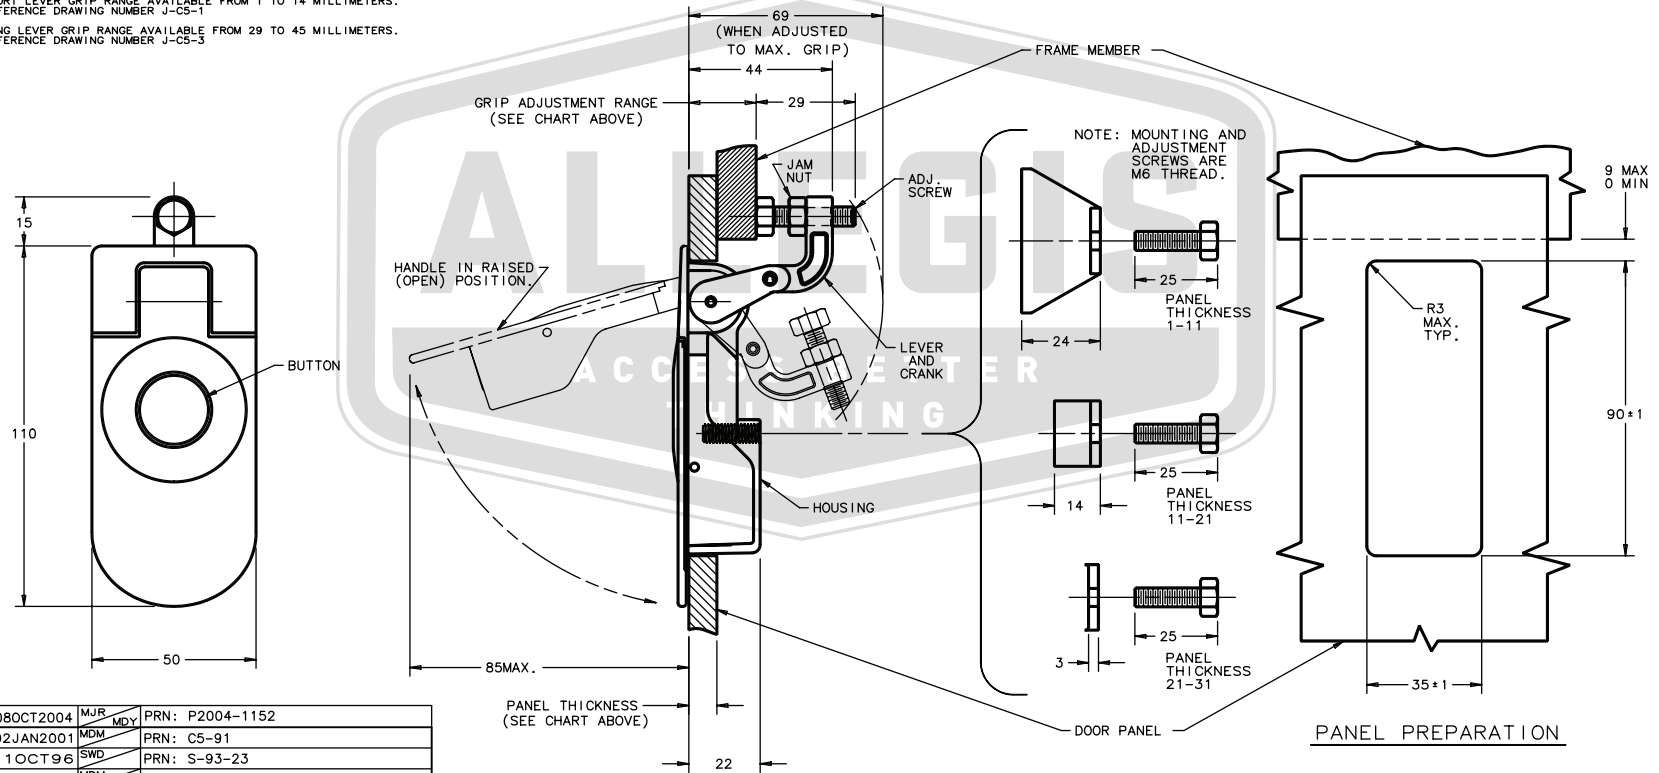

REV	DATE	DRAWN	REVISIONS
D	08OCT2004	MJR	PRN: P2004-1152
C	02JAN2001	MDY	PRN: C5-91
B	11OCT96	SWD	PRN: S-93-23
A	19JUL95	MDM	PRN: C5-21

PANEL PREPARATION

THIRD ANGLE PROJECTION,
 ALL DIMENSIONS ARE MILLIMETERS.

ALLEGIS		1-866-378-7550
MATERIAL:	DRAWING NO. :	
	C5-11-16	
FINISH:		
REV.:	1:1	DATE: 6/06/2019