

PANEL THICKNESS FROM 1 TO 16.8 Max.

NEED NOT SPACER IF PANEL THICKNESS > 4.1


2x  $\phi 5 \pm 0.1$

TA=0 (FOR CONICAL END CABLE TYPES 3, 5 OR 7) REFER TO SOUTHCO DRAWING J-AC-C

TA=5 (FOR SNUB END CABLE TYPES 6 OR 7) REFER TO SOUTHCO DRAWING J-AC-C

$\phi 4.1$

M8X1.25 THREAD  
18mm DEPTH MIN.  
(MAXIMUM MOUNTING TORQUE: 40N.M)

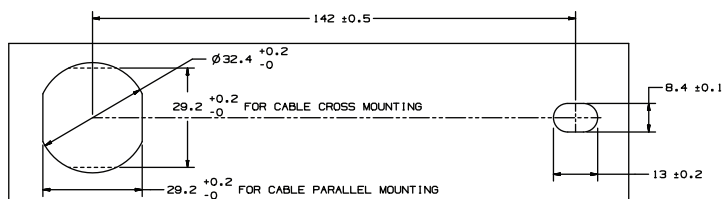

PANEL PREPARATION  
THICKNESS: 1MM TO 16.8MM Max.

- NOTE:
- A. HOUSING SEAL, SPACER, METAL NUT, CABLE HOLDER WITH E-RING PACKAGE SEPARATELY
  - B. MATERIAL AND FINISH:
    - BUTTON: REINFORCED NYLON, SEE V;
    - HOUSING: ZINC DIE CAST OR STAINLESS STEEL, SEE U FOR HOUSING MATERIAL AND FINISH
    - LOCK PLUG: ZINC DIE CAST WITH BRIGHT STAINLESS COVER
    - MOUNTING NUT, ROTATION SHAFT: ZINC DIE CAST OR STAINLESS STEEL
    - PAWL, PAWL WASHER, RIVET: STAINLESS STEEL, PASSIVATED
    - E-RING, SCREW, SPRING: STAINLESS STEEL, PASSIVATED

PART NUMBER  
AC-40-XYZ-UV-WWWW

END STYLE  
LOCKING OPTION  
MOUNTING METHOD  
HANDLE MATERIAL  
BUTTON FINISH  
KEY CODES

END STYLE - X:  
1-WITH PAWL ATTACHMENT

LOCKING OPTION - Y:  
2-REVERSIBLE KEY (2 KEYS INCLUDED - R001)

MOUNTING METHOD - Z (SEE SHEET 21):  
1-CABLE PARALLEL (OR NO CABLE), WITH SPACER MOUNTING - MUST HAVE IF GLASS PANEL

HANDLE MATERIAL - U:  
1-BLACK GF NYLON WITH ZINC HOUSING INSERT

BUTTON MATERIAL & FINISH - V:  
1-NYLON WITH BLACK MOLDING

KEY CODES (ONLY USE WHEN Y=3 OR 6) - WWWW:  
KD10-KEYED DIFFERENTLY (10 CODES)  
MK10-MASTER KEYED, KEYED DIFFERENTLY (10 CODES)

<a href="http://www.allegiscorp.com">www.allegiscorp.com</a> <b>1-866-378-7550</b>		MATERIAL / FINISH : <b>Black Nylon</b>	
REV. :	DATE :	DESCRIPTION :	DRAWING NO. :
1:1	1-24-2019	Push to Close Actuator	AC-40-121-11