


Style PS (1/4 - 20)

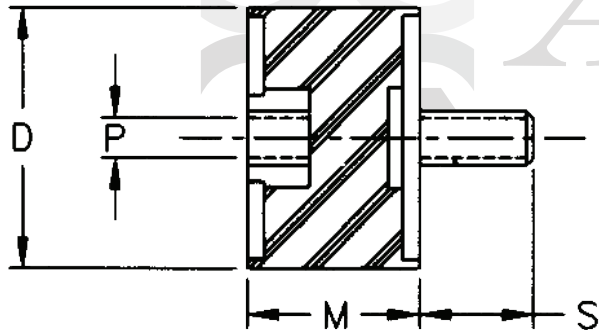

Part No.	D	M	1/4-20 x S	P	Max. Shear (lbs.)	Max. Comp. (lbs.)
50823*	5/8	5/8	1/2	1/4-20	5	15
51201*	3/4	1/2	1/2	1/4-20	8	21
51202*	3/4	1/2	1/2	1/4-20	12	28
51203*	3/4	1/2	1/2	1/4-20	16	34
51204*	3/4	1/2	1/2	1/4-20	20	40
50839*	1	1/2	1/2	1/4-20	35	70
51129*	1	17/32	1/2	1/4-20	32	45
51145*	1	3/4	1/2	1/4-20	18	50
51151*	1	3/4	3/8	1/4-20	24	55
51156*	1	3/4	3/8	1/4-20	28	65
51161	1	3/4	1/2	1/4-20	18	45
51162	1	3/4	1/2	1/4-20	20	50
51163	1	3/4	1/2	1/4-20	21	55
51166*	1	3/4	1/2	1/4-20	35	75
51188*	1	3/4	1/2	1/4-20	30	65
51582	1	3/4	3/4	1/4-20	18	45
51137	1	1	1/2	1/4-20	10	30
51198*	1	1	1/2	1/4-20	20	50
50782*	1	1	3/4	1/4-20	15	40

Standard elastomer is Natural Rubber, (*) indicates Neoprene
P thread depth is minimum one thread diameter

www.ALLEGISCORP.com
1-866-378-7550

MATERIAL / FINISH :
Natural Rubber or ((*)) Neoprene
w/ corrosion resistant zinc plated inserts

REV. :
1 : 1

DATE :
1-10-2013

DESCRIPTION :
Stud / Plate Mounts

DRAWING NO. :
50823 - 50782